

炮头

DIFFUSERS

直流, 开花 和喷雾三种喷射模式。硬质阳极氧化铝合金或不锈钢材质。通过转动炮头射流调节圈调节射流状态。
 Straight stream, attack spray and wide angle spray. In anodised aluminium or stainless steel. Stream selection by head ring.

固定流量炮头 DIFFUSERS WITH FIXED FLOW RATE



MAGIKADOR 750 炮头
DIFFUSER MAGIKADOR 750
 POKINOR 3000 炮头
DIFFUSER POKINOR 3000
 POKATAK 2000-3000 炮头
DIFFUSER POKATAK 2000-3000

流量可调节炮头 DIFFUSERS WITH SELECTABLE FLOW RATE



MAGIKADOR 3000 炮头
DIFFUSER MAGIKADOR 3000
 TURBOKADOR 3000 炮头
DIFFUSER TURBOKADOR 3000
 DEBIKADOR 6000 炮头
DIFFUSER DEBIKADOR 6000

自动调压炮头 DIFFUSERS WITH AUTOREGULATION



TORNADOMATIC 3000 炮头
DIFFUSER TORNADOMATIC 3000
 AUTOKADOR 5000 炮头
DIFFUSER AUTOKADOR 5000


不锈钢炮头 DIFFUSERS IN STAINLESS STEEL



DEBIKA-INOX 3000 炮头
DIFFUSER DEBIKA-INOX 3000

档位调节炮头
DIFFUSER SETTED
ON POSITION:

- 1000 L/min
- 2000 L/min
- 3000 L/min

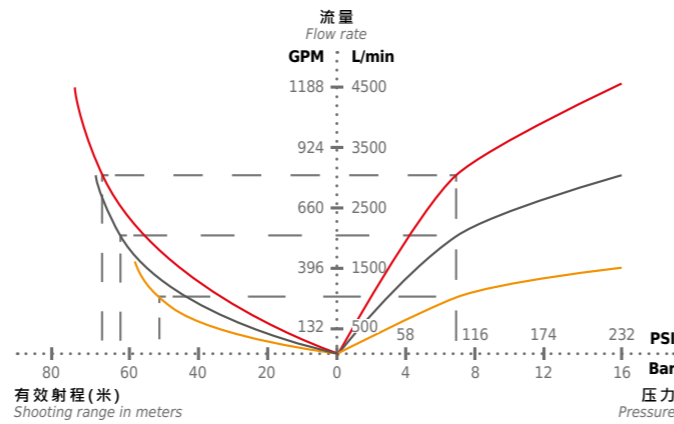

接口

COUPLINGS



STORZ NST GFR MACHINO GOST DSP BARCELONA INSTANTANEOUS

PLA_01079_Flyer CH-EN_手动消防炮_Manuals Monitors



POK CHINA

博克消防装备科技有限公司


地址: 北京市顺义区南彩镇彩达三街一号茂华工场5号厂房2层201室 · POK

电话: 010 64667868

邮箱: info@pokchina.com sales@pokchina.com

www.pokchina.com

手动消防炮 MANUAL MONITORS

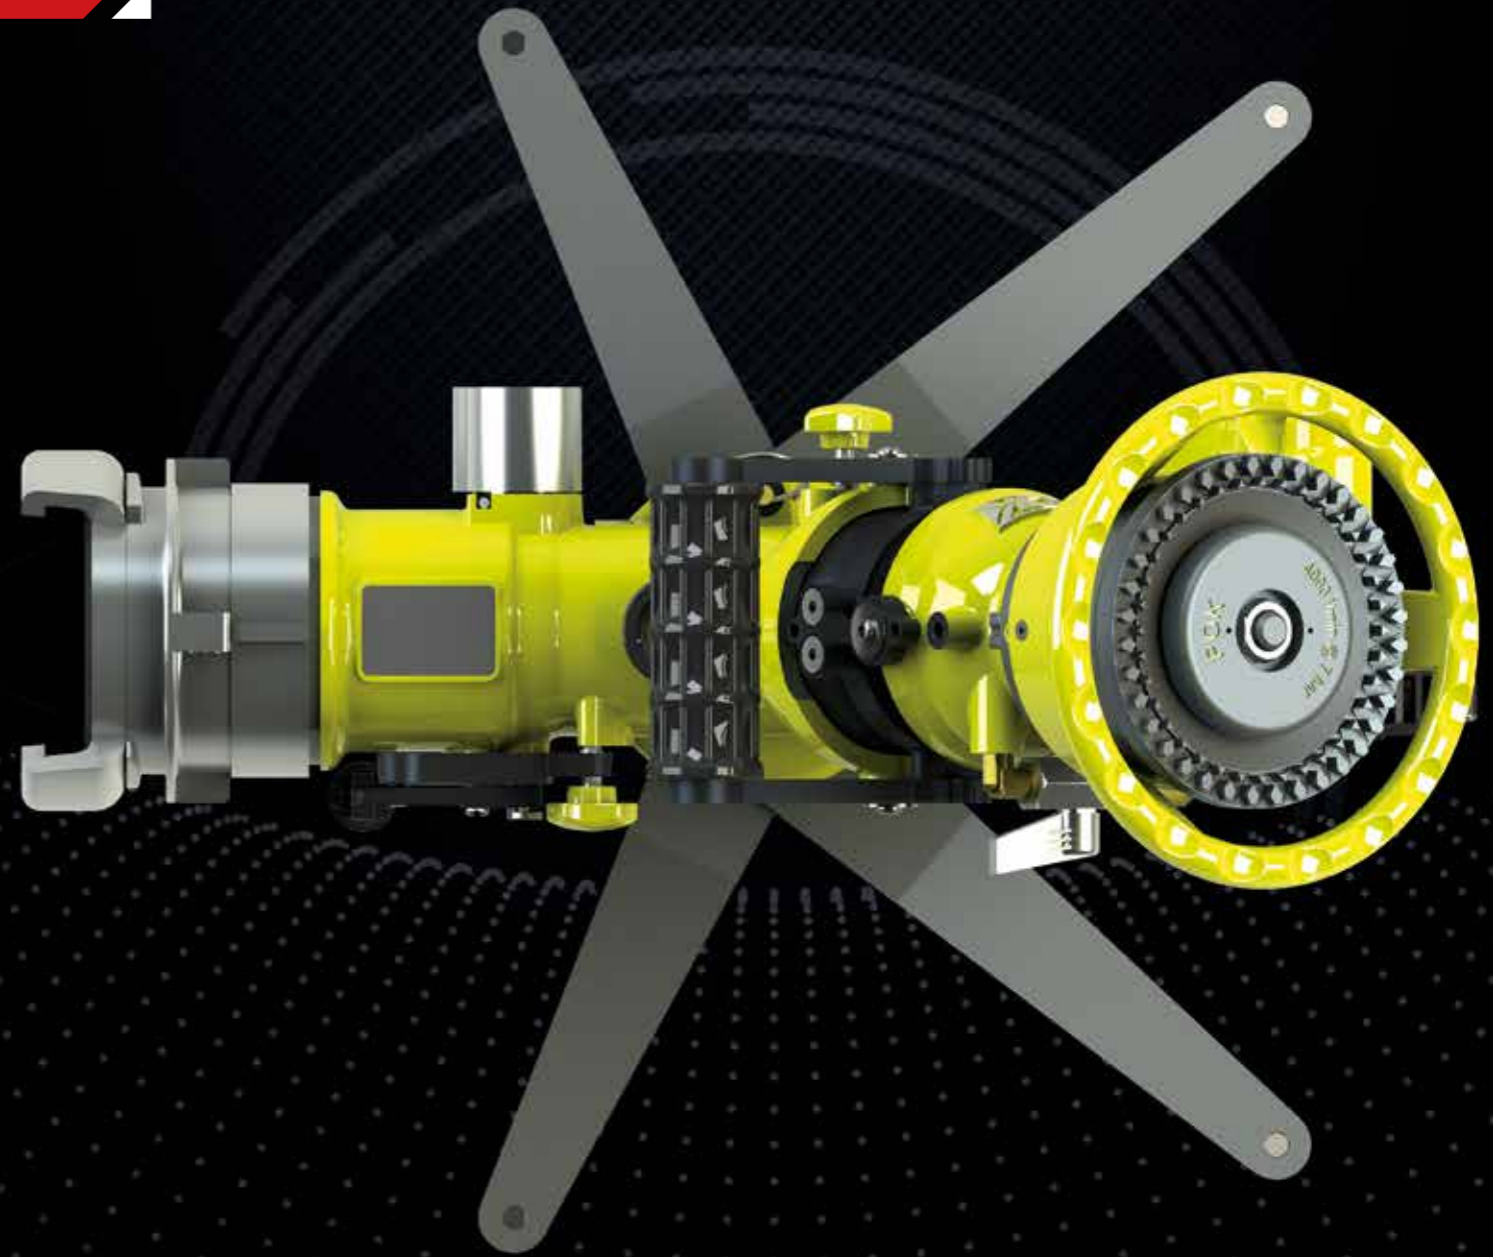


充满激情的创造者 / WE CREATE WITH PASSION




FROGGY
移动式消防炮
PORTABLE MONITORS

固定流量炮头 750 升/分。操作简单，结构紧凑，轻便。
Diffuser with fixed flow rate 750 lpm. Easy to use, ultra compact, light.



- ▶ 重量：6 kg / Weight: 6 kg
- ▶ 入水口：外螺纹 2"1/2 BSP / Inlet: male 2"1/2 BSP
- ▶ 水路直径 \varnothing ：40 mm / \varnothing waterway: 40 mm
- ▶ 最大工作压力：PN16 / Nominal pressure: PN16
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 开关类型：球阀 / Valve type: ball-valve
- ▶ 开关方式：通过操作杆 / Operation: by lever
- ▶ 水平旋转角度：-26° 到 +26° / Horizontal movement: from -26° to +26°
- ▶ 水平旋转调整方式：铰接球 / Horizontal adjustment: by ball
- ▶ 垂直俯仰角度：+24° 到 +76° / Vertical movement: from +24° to +76°
- ▶ 垂直俯仰角度调节方式：铰接球 / Vertical adjustment: by ball
- ▶ 安全系统：折叠支架锁止，安全绳，开关阀
Safety: locking of the legs, anchoring strap, shutoff
- ▶ 搬运手柄：是 / Carrying handle: YES
- ▶ 折叠支架：是 / Foldable legs: YES
- ▶ 选配：出水口设备，入水口接口，存储托盘
Options: outlet equipment, inlet couplings, storage bracket



MINOTOR 5000
固定式消防炮
FIXED MONITORS

5000 升/分炮头。水平旋转角度 360°，手轮调节垂直仰俯角度，最大流量 5000 升/分。
Diffuser 5000 lpm. Horizontal movement 360°, vertical adjustment by handwheel, maximum flow rate 5000 lpm.




- 水路直径 \varnothing ：100 mm / \varnothing waterway: 100 mm
- 最大工作压力：PN16 / Nominal pressure: PN16
- 材料：铝合金 / Material: aluminium alloy
- 表面处理：聚酯涂层 / Surface treatment: polyester coating
- 水平旋转角度：360° 无限旋转 / Horizontal movement: 360°
- 水平旋转调整方式：手柄 / Horizontal adjustment: by handwheel
- 垂直俯仰角度：+30° 到 +75° / Vertical movement: from +30° to +75°
- 垂直俯仰角度调节方式：手轮 / Vertical adjustment: by handwheel
- 安全系统：垂直俯仰角度 +30° 手柄锁止，水平旋转角度锁栓锁定
Safety: vertical adjustment lockable at 30° by handle, horizontal adjustment locking knobs
- 选配：出水口设备，入水口接口 / Options: Outlet equipment, inlet couplings



水平射程
HORIZONTAL RANGE
ANGLE 30°

- 4000 L/min
- 3000 L/min
- 2000 L/min


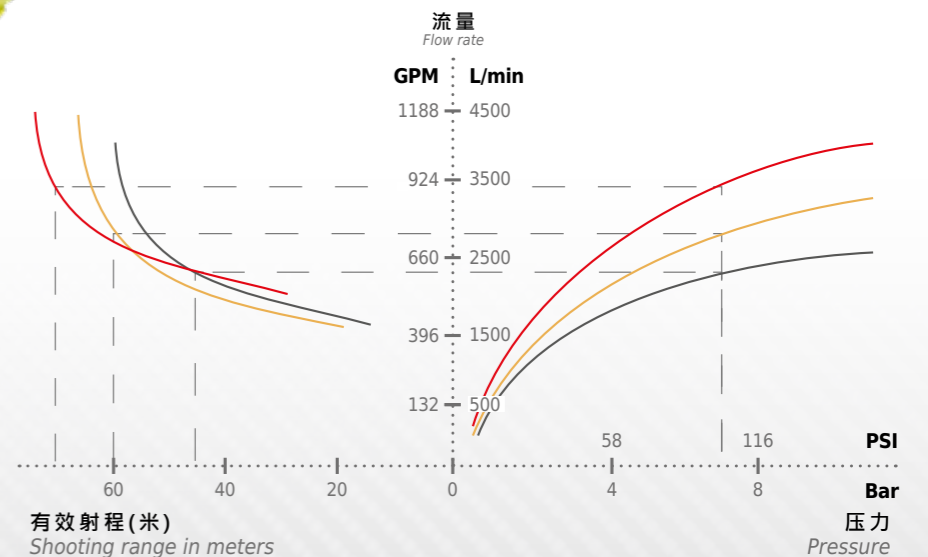




MERCATOR 3000
固定式不锈钢消防炮
 FIXED MONITORS IN STAINLESS STEEL

3000 升/分炮头。整体采用不锈钢制成，可在盐性介质，室外使用。
 Diffuser 3000 lpm. Entirely made in stainless steel, for marine environment and outdoor use.


- ▶ 水路直径 \varnothing : 80 mm / \varnothing waterway: 80 mm
- ▶ 最大工作压力 : PN16 / Nominal pressure: PN16
- ▶ 不锈钢 / Material: stainless steel
- ▶ 水平旋转角度 : 360° 无限旋转 / Horizontal movement: 360°
- ▶ 水平旋转调整方式 : 操作手柄 / Horizontal adjustment: by operating handle
- ▶ 垂直俯仰角度 : -60° 到 +80° / Vertical movement: from -60° to +80°
- ▶ 垂直俯仰角度调节方式 : 操作手柄 / Vertical adjustment: by operating handle
- ▶ 选配 : 出水口设备 / Options: outlet equipment



MONTMIRAIL
移动式消防炮
 PORTABLE MONITORS

流量自动调节炮头 2000 升/分。
 重量低于 10Kg, 流量可达到 4000 升/分,
 安全防颠覆, 自摆。
 Diffuser with autoregulated flow rate 2000 lpm.
 Less than 10kg, up to 4000 lpm, safety anti-lifting,
 automatic sweeping.

- ▶ 入水口 : 外螺纹 2"1/2 BSP / Inlet: male 2"1/2 BSP
- ▶ 水路直径 \varnothing : 80 mm / \varnothing waterway: 80 mm
- ▶ 最大工作压力 : PN16 / Nominal pressure: PN16
- ▶ 材料 : 铝合金 / Material: aluminium alloy
- ▶ 表面处理 : 聚酯涂层和硬质阳极氧化
- ▶ 开关类型 : 球阀 / Valve type: ball-valve
- ▶ 开关 : 通过操作杆 / Operation: by lever
- ▶ 水平旋转角度 : -22,5° 到 +22,5° / Horizontal movement: from -22,5° to +22,5°
- ▶ 通过阀门可调节水平自摆角度。
- ▶ Horizontal adjustment of automatic sweeping by valve
- ▶ 垂直俯仰角度 : +25° 到 +85° / Vertical movement: from +25° to +85°
- ▶ 垂直俯仰角度调节方式 : 手柄 / Vertical adjustment: by handle
- ▶ 安全系统 : 防侧滑, 防水锤, 防颠覆, 支架锁定, 安全带, 开关阀
- ▶ Safety: anti-sliding, anti-knocking, anti-lifting, locking of the legs, anchoring strap, shutoff
- ▶ 搬运手柄 : 是 / Carrying handle: YES
- ▶ 折叠支架 : 是 / Foldable legs: YES
- ▶ 选配 : 入水口接口, 出水口设备, 入水口集水器
- ▶ Options: Inlet coupling, outlet equipment, inlet siamese

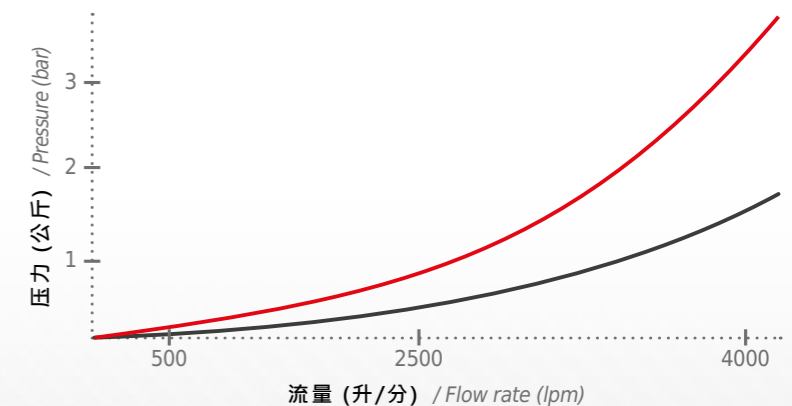


最小压损. (公斤) / Mini. pressure loss (bar) ○ 最大压损. (公斤) / Maxi. pressure loss (bar) ○




LMP 80 移动式消防炮 PORTABLE MONITORS

配流量可调节炮头 3000 升/分。即可固定也可移动，结实耐用，配压力表，具有自动清洗功能。
Diffuser with variable flow rate 3000 lpm. Can be used as fixed or portable, robust, integrated pressure gauge, automatic flush.




- ▶ 入水口：外螺纹 4" BSP / Inlet: male 4" BSP
- ▶ 水路直径 \varnothing : 80 mm / \varnothing waterway: 80 mm
- ▶ 最大工作压力：PN16 / Nominal pressure: PN16
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水平旋转角度：-153° 到 +101° / Horizontal movement: from -153° to +101°
- ▶ 水平旋转调整方式：手轮或手柄 / Horizontal adjustment: by handwheel or handle
- ▶ 垂直俯仰角度：+0° 到 +85° / Vertical movement: from +0° to +85°
- ▶ 垂直俯仰角度调节方式：手轮 / Vertical adjustment: by handwheel
- ▶ 安全系统：垂直俯仰角度+30°，设有安全限位销锁止 水平锁止手轮，折叠支架锁止，安全绳
Safety: vertical adjustment lockable at 30° by pin, locking knob for horizontal adjustment, locking of the legs, anchoring strap
- ▶ 搬运手柄：是 / Carrying handle: YES
- ▶ 折叠支架：是 / Foldable legs: YES
- ▶ 选配：出水口设备，入水口接口，存储托盘
Options: outlet equipment, inlet couplings, storage bracket

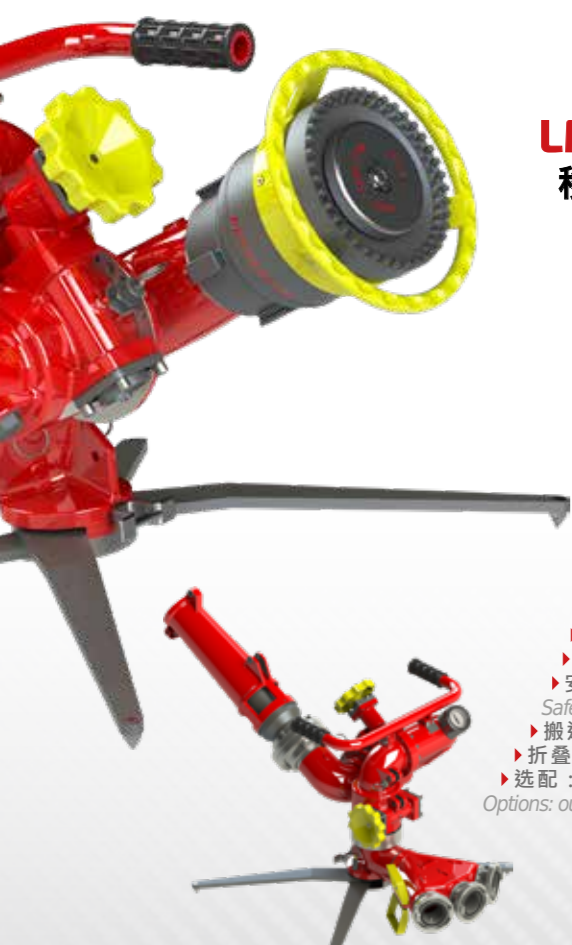


LMP 100 移动式消防炮 PORTABLE MONITORS

5000 升/分炮头。大流量移动式消防炮，固定式或移动式两种型式可选，水平旋转角度 360°。
Diffuser 5000 lpm. Portable monitor with high flow rate, can be used as fixed or portable, horizontal movement 360°.




- ▶ 入水口：外螺纹 4" BSP / Inlet: male 4" BSP
- ▶ 水路直径 \varnothing : 100 mm / \varnothing waterway: 100 mm
- ▶ 最大工作压力：PN16 / Nominal pressure: PN16
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水平旋转角度：360° 无限旋转 / Horizontal movement: 360°
- ▶ 水平旋转调整方式：手轮 / Horizontal adjustment: by handwheel
- ▶ 垂直俯仰角度：+30° 到 +85° / Vertical movement: from +30° to +85°
- ▶ 垂直俯仰角度调节方式：手轮 / Vertical adjustment: by handwheel
- ▶ 安全系统：垂直俯仰角度+30°安全限位销锁止，折叠支架锁止，安全绳
Safety: vertical adjustment lockable at 30° by stop, locking of the legs, anchoring strap
- ▶ 搬运手柄：是 / Carrying handle: YES
- ▶ 折叠支架：是 / Foldable legs: YES
- ▶ 选配：出水口设备，入水口接口
Options: outlet equipment, inlet couplings



PRIMATOR 3000 固定式消防炮 FIXED MONITORS

3000 升/分 TurboKador 炮头。操作简单，安全限位销，水平旋转角度 360°，可用于护栏或者梯子上。
Diffuser Turbokador 3000 lpm. Easy to use, lockable by pin, horizontal movement on 360°, can be used on a cradle or on a ladder.

- ▶ 水路直径 \varnothing : 100 mm / \varnothing waterway: 100 mm
- ▶ 最大工作压力：PN16 / Nominal pressure: PN16
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水平旋转角度：360°无限旋转 / Horizontal movement: over 360°
- ▶ 水平旋转调整方式：手柄 / Horizontal adjustment: by handwheel
- ▶ 垂直俯仰角度：-70° 到 +85° / Vertical movement: from -70° to +85°
- ▶ 垂直俯仰角度调节方式：手柄 / Vertical adjustment: by handle
- ▶ 安全系统：垂直俯仰限位销，水平旋转限位手轮
Safety: vertical adjustment lockable by pin, horizontal adjustment lockable by knob
- ▶ 选配：出水口设备，入水口接口，底座，梯架
Options: outlet equipment, inlet couplings, base, ladder attachment



AZIMUTOR 3000 固定式消防炮 FIXED MONITORS

固定流量炮头 3000 升/分。垂直俯仰角度通过手轮调节，配有五个折叠支腿，可用拖车运输。
Diffuser with fixed flow rate 3000 lpm. Vertical adjustment by handwheel, equipped with klap-klap bracket, transport on trolley.

- ▶ 水路直径 \varnothing : 80 mm / \varnothing waterway: 80 mm
- ▶ 最大工作压力：PN16 / Nominal pressure: PN16
- ▶ 材料：铝合金 / Material: aluminium alloy
- ▶ 表面处理：聚酯涂层 / Surface treatment: polyester coating
- ▶ 水平旋转角度：360°无限旋转 / Horizontal movement: over 360°
- ▶ 水平旋转调整方式：手柄 / Horizontal adjustment: by handle
- ▶ 垂直俯仰角度：+30° 到 +80° / Vertical movement: from +30° to +80°
- ▶ 垂直俯仰角度调节方式：手轮 / Vertical adjustment: by handwheel
- ▶ 安全系统：垂直俯仰角度+30°安全限位销锁止，垂直和俯仰操作手轮锁止
Safety: vertical adjustment lockable at 30° by pin, vertical and horizontal adjustment locking knobs
- ▶ 搬运手柄：是 / Carrying handle: YES
- ▶ 选配：出水口设备，入水口接口
Options: outlet equipment, inlet couplings

