

消防卷盘附件

ACCESSORIES FOR HOSE REELS



消防卷盘安装支架
MOUNTING SUPPORT FOR
HOSE REELS



存储柜
STORAGE CABINET




消防卷盘保护盖
PROTECTION COVER FOR HOSE REELS




消防枪 DN19, DN25, DN33 - 符合标准 EN 671-1
DIFFUSERS DN19, DN25, DN33 - CONFORM TO NORM EN 671-1

消防卷盘附件

ACCESSORIES FOR HOSE REELS



固定地面安装带上部软管
导向器
UPPER HOSE GUIDE FOR
FIXED GROUND INSTALLATION



固定墙安装带上部软管
导向器
UPPER HOSE GUIDE FOR
FIXED WALL INSTALLATION



固定地或天花板安装带下部软管
导向器
LOWER HOSE GUIDE FOR FIXED
GROUND INSTALLATION OR CEILING



伸缩软管导向器
RETRACTABLE HOSE
GUIDE

PLA_01081_Flyer CH-EN_刚性软管卷盘_Hose reels

刚性软管卷盘 HOSE REELS



POK CHINA

博克消防装备科技有限公司

地址：北京市顺义区南彩镇彩达三街一号茂华工场5号厂房2层201室 · POK

电话：010 64667868

邮箱：info@pokchina.com sales@pokchina.com

www.pokchina.com

充满激情的创造者 / WE CREATE WITH PASSION

RIA

冲压板·依据NF标准·聚酯涂层·旋转摇摆式·旋转固定式完整的尺寸系列(19, 25, 33)

Stamped plate, according to NF norms, polyester coating, rotating-swinging, rotating-fixed, complete range (19, 25, 33).




旋转固定式

DN 19, DN 25, DN 33 (20 - 30 M)

ROTATING FIXED - DN 19, DN 25, DN 33 (20-30 M)

- ▶ 最大工作压力: DN19: 12 bar, DN25: 12 bar, DN33: 7 bar
Maximum working pressure: DN19: 12 bar, DN25: 12 bar, DN33: 7 bar
- ▶ 认证: CE0333 和 NF EN 671-1 / Certification: CE0333 and NF EN 671-1
- ▶ 刚性软管长度: 20/30 米 / Hose capacity: 20/30 meters
- ▶ 材料: 钢和铝合金 / Material: steel and aluminium alloy
- ▶ 表面处理: 聚酯涂覆 / Surface treatment: polyester coating
- ▶ 操作: 1/4圈关闭或手轮关闭
Operation: 1/4 turn shutoff or handwheel shutoff

▶ 选配: 固定到底面的安装支架·防护盖
Options: mounting support to fix to the floor, protecting cover




旋转摇摆式

DN 19, DN 25, DN 33 (20 - 30 M)

ROTATING SWINGING - DN 19, DN 25, DN 33 (20-30 M)

- ▶ 最大工作压力: DN19: 12 bar, DN25: 12 bar, DN33: 7 bar
Maximum working pressure: DN19: 12 bar, DN25: 12 bar, DN33: 7 bar
- ▶ 认证: CE0333 和 NF EN 671-1 / Certification: CE0333 and NF EN 671-1
- ▶ 刚性软管长度: 20/30 米 / Hose capacity: 20/30 meters
DN19 - 20/30 米 / DN25 - 20/30 米 / DN33 - 20/30 米
- ▶ 材料: 钢和铝合金 / Material: steel and aluminium alloy
- ▶ 表面处理: 聚酯涂覆 / Surface treatment: polyester coating
- ▶ 操作: 1/4圈关闭或手轮关闭 / Operation: 1/4 turn shutoff or handwheel shutoff
- ▶ 选配: 固定到底面的安装支架·储存柜·防护盖
Options: mounting support to fix to the floor, storage cabinet, protecting cover

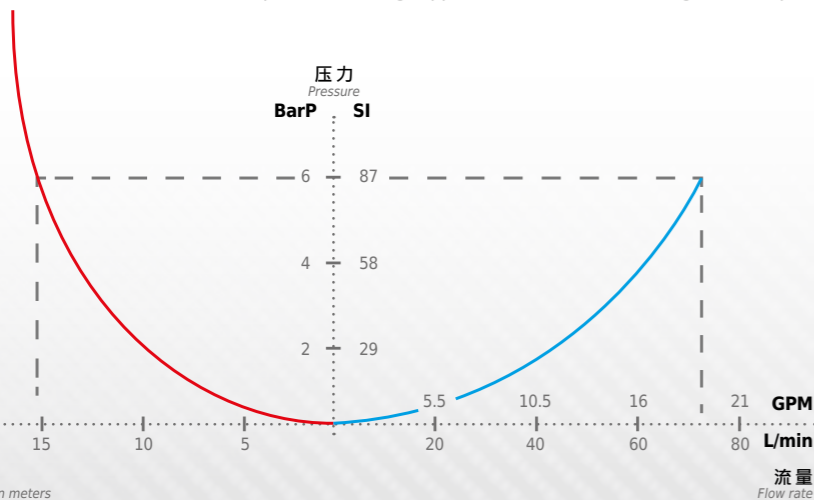


手动软管卷盘

DN 25 (40-80 M) / DN 33 (20-40 M)

MANUAL HOSE REELS

DN 25 (40-80 M) / DN 33 (20-40 M)



消防用手动软管卷盘·许用 \varnothing 25直径的半刚性水管直接供水或 \varnothing 45直径的扁平水带储存。采用钢制和铝合金制的牢靠结构·表面喷漆·使用简单。


Manual hose reels for firefighting vehicles allowing the water supply of semi-rigid hoses \varnothing 25 or the storage of flat fire hoses \varnothing 45.

Very robust construction in painted steel and aluminium alloy. Easy to use.

- ▶ 材料: 钢和铝合金
Material: steel and aluminium alloy
- ▶ 表面处理: 聚酯涂层
Surface treatment: polyester coating
- ▶ 缠绕: 通过曲柄或手轮
Winding: by crank handle or wheel
- ▶ 卷盘锁止: 通过锁止装置或操作杆
Reel locking: by locking device or lever

▶ 选配: 宽度按要求定制·板面 \varnothing 480 mm 或者 \varnothing 610mm

▶ 选配: 伸缩水带导向·上水带导向
Options: width on demand, plate \varnothing 480 mm and \varnothing 610 mm, retractable hose guide, upper hose guide

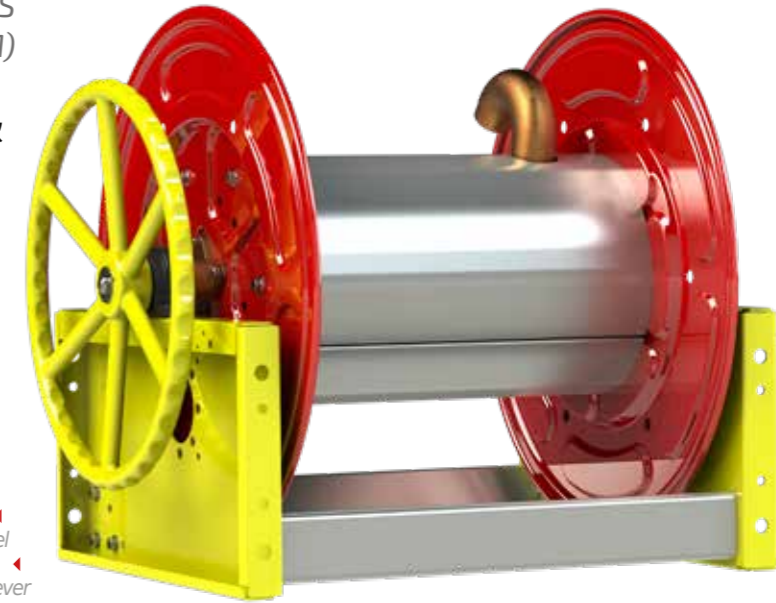


电动软管卷盘

DN 25 (40-80 M) / DN 33 (20-40 M)

MOTORISED HOSE REELS

DN 25 (30 M) / DN 33 (30 M)



新一代消防用电动软管卷盘·极其牢靠·可靠的结构·许用 \varnothing 25直径的半刚性水带直接供水或 \varnothing 45直径的扁平水带储存。

驱动电机配备扭矩限定器便于电机保护; 配备备用曲柄«New generation» motorised hose reels for firefighting vehicles, ultra-robust and reliable conception, for semi-rigid hoses \varnothing 25 (water supplied) or flat fire hoses DN45 (storage). Powerful motorised rolling with torque limiter for motor protection and backup crank handle.

- ▶ 材料: 钢和铝合金
Material: steel and aluminium alloy
- ▶ 表面处理: 聚酯涂层
Surface treatment: polyester coating
- ▶ 缠绕: 通过电机或备用曲柄
Winding: motorised or backup crank handle
- ▶ 缠绕速度: 约0,5 m/s
Winding speed: approx. 0,5 m/s
- ▶ 供电电压: 24V DC
Electrical supply: 24V CC
- ▶ 电机保护: 机械式扭矩减速器
Motor protection: mechanical torque reductor
- ▶ 卷盘锁止: 通过操作杆
Reel locking: by lever

▶ 选配: 宽度按要求定制·板面 \varnothing 480 mm 或者 \varnothing 610mm
▶ 可伸缩式软管导向器·上部水带导向器

Options: width on demand, plate \varnothing 480 mm and \varnothing 610 mm, retractable hose guide, upper hose guide

